



2016

Taking Innovation to
New Depths



VL7500P


**Li ion Rechargeable Battery High Power
LED Video Light**



Features



4 Levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL18650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance

SPECIFICATIONS

Light source	: 15 x XML LED + 6 x XPE Red LED
Light output	: 750 Lm (level I), 1875 Lm (level II) 3750 Lm (level III), 7500 Lm (level IV)
Light output (Red color mode)	: 500 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650 x 4
Angle of light beam	: 120° wide beam
Color temperature	: 6500K
Burn time	: 2.5 hrs (level IV), 5 hrs(level III) 10 hrs(level II) and 25 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 55.4 x L. 130.6mm
Weight in air	: 457 g (including battery)
Buoyancy in seawater	: -173 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Removable yellow filter
enhances warmer color
tone



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup

VL 5800P TRI COLOR


Li ion Rechargeable Battery High Power
LED Video Light with Three Color Output



Features




3 Levels of brightness for cool white mode,
3 Levels of brightness for warm white mode
1 level of brightness of Red color mode and SOS
controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color




BATCELL 18650x4
Li ion Rechargeable Battery



Built-in red color led enhances focusing performance

SPECIFICATIONS

Light source	: 15 x XML LED + 6 x XPE Red LED
Light output	: 1450 Lm (level I), 2900 Lm (level II)
(Cool white mode)	5800 Lm (level III)
Light output	: 725 Lm (level I), 1450 Lm (level II)
(Warm white mode)	2900 Lm (level III)
Light output	: 500 Lm
(Red color mode)	
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650 x 4
Angle of light beam	: 120° wide beam
Color temperature	: 6500K cold white and 5500K warm white
Burn time	: 3 hrs (level III), 6 hrs(level II) and 12 hrs(level I)
Maximum depth	: 100 m tested
Size	: Dia. 55.4 x L. 130.6mm
Weight in air	: 457 g (including battery)
Buoyancy in seawater	: -173 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Built-in yellow color led
enhances warmer color
tone



Sturdy glove for
hands-free operation
underwater



Comes with ball joint
for easy system setup

VTL 5500P


Li ion Rechargeable Battery High Power
LED Video / Tech Light



Features




4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 18650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance

SPECIFICATIONS

Light source	: 11 x XML LED + 6 x XPE Red LED
Light output	: 550 Lm (level I), 1375 Lm (level II)
(Flood beam mode)	2750 Lm (level III), 5500 Lm (level IV)
Light output	: 1000 Lm
(Spot beam mode)	
Light output	: 500 Lm
(Red color mode)	
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650 x 4
Angle of light beam	: 120° wide beam and 10° narrow beam
Color temperature	: 6500K
Burn time	: 3 hrs (level IV), 6 hrs(level III) 12 hrs(level II) and 30 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 55.4 x L. 152.3mm
Weight in air	: 498 g (including battery)
Buoyancy in seawater	: -161 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included




Removable yellow filter enhances warmer color tone



Sturdy glove for hands-free operation underwater



Comes with ball joint for easy system setup



Angle of light beam

TL 4500P


**Li ion Rechargeable Battery High Power
LED Tech Light**



Features



4 Levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 18650x4
Li ion Rechargeable
Battery



Sturdy Goodman
Glove for handy
Tech-dive operation

SPECIFICATIONS



Light source	: 4 x XML LED
Light output	: 450 Lm (level I), 1125 Lm (level II) 2250 Lm (level III), 4500 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650 x 4
Angle of light beam	: 10° narrow beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 4 hrs(level III) 8 hrs(level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 72 x L. 150.3mm
Weight in air	: 596 g (including battery)
Buoyancy in seawater	: -222 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Ergonomic aluminum handle comes in a package



Goodman handle with connector.
Sold seperately

TL 4500PC


Li ion Rechargeable Battery High Power
LED Tech Light with Battery Canister



Features



4 Levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL32650x4 CANISTER Li ion Rechargeable Battery



Ergonomic aluminum handle comes in a package

SPECIFICATIONS

Light source	: 4 x XML LED
Light output	: 450 Lm (level I), 1125 Lm (level II) 2250 Lm (level III), 4500 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL 32650x4CANISTER
Angle of light beam	: 10° narrow beam
Color temperature	: 6500K
Burn time	: 7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	: 100 m tested
Size (Light head)	: Dia. 72 x L. 94.3mm
Size (Canister)	: Dia. 92 x L. 119mm
Weight in air (Light head)	: 500g
Weight in air (Canister)	: 1265g
Buoyancy in seawater : (Light head)	: -246g
Buoyancy in seawater : (Canister)	: -463g
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



Goodman handle
with connector.
Comes in a package



Easy to charge up
the canister

VL 15000P PRO


Li ion Rechargeable Battery Super
Power LED Video Light



Features



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL26650x4
Li ion Rechargeable
Battery



Built-in red color led
enhances focusing
performance

15000 LUMENS

Angle of light beam

160° wide beam

SPECIFICATIONS

Light source	: 25 x XML LED + 6 x XPE Red LED
Light output	: 1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	: 700 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL26650x4
Angle of light beam	: 160° wide beam
Color temperature	: 6500K
Burn time	: 3 hrs (level IV), 6 hrs(level III) 12 hrs(level II) and 30 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 76 x L. 127.2mm
Weight in air	: 902 g (including battery)
Buoyancy in seawater	: -346 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



25pcs XML LED to provide 15000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Protective case for VL 15000P Pro. Sold separately

VL 15000P PRO TRI COLOR


**Li ion Rechargeable Battery Super Power LED Video Light
with Three Color Output**



Features



3 Levels of brightness for cool white mode,
3 Levels of brightness for warm white mode
1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL26650x4
Li ion Rechargeable Battery



Built-in red color led enhances focusing performance

15000 LUMENS

Angle of light beam

160° wide beam

SPECIFICATIONS

Light source	: 35 x XML LED + 6 x XPE Red LED
Light output	: 3750 Lm (level I), 7500 Lm (level II)
(Cool white mode)	: 15000 Lm (level III)
Light output	: 1500 Lm (level I), 3000 Lm (level II)
(Warm white mode)	: 6000 Lm (level III)
Light output	: 700 Lm
(Red color mode)	
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL26650x4
Angle of light beam	: 160° wide beam
Color temperature	: 6500K cool white and 5500K warm white
Burn time	: 3 hrs (level III), 6 hrs(level II) and 12 hrs(level I)
Maximum depth	: 100 m tested
Size	: Dia. 76 x L. 127.2mm
Weight in air	: 921 g (including battery)
Buoyancy in seawater	: -365 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



Built-in yellow color led enhances warmer color tone



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package

VL 15000PC PRO


**Li ion Rechargeable Battery Super Power LED
Video Light with Battery Canister**



Features



4 levels of brightness
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL32650x4
CANISTER
Li ion Rechargeable
Battery



Ergonomic aluminum
handle comes in a
package

SPECIFICATIONS

Light source	: 25 x XML LED + 6 x XPE Red LED
Light output	: 1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	: 700 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL32650x4CANISTER
Angle of light beam	: 160° wide beam
Color temperature	: 6500K
Burn time	: 4 hrs (level IV), 8 hrs(level III) 16 hrs(level II) and 40 hrs (level I)
Maximum depth	: 100 m tested
Size (Light head)	: Dia. 76 x L. 60.2mm
Size (Canister)	: Dia. 92 x L. 119mm
Weight in air (Light head)	: 418g
Weight in air (Canister)	: 1265g
Buoyancy in seawater : -111g (Light head)	
Buoyancy in seawater : -463g (Canister)	
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



25pcs XML LED to provide 15000 lumens



Comes with ball joint for easy system setup



Built-in red color led enhances focusing performance



Easy to charge up the canister

VL 25000PM


**Li ion Rechargeable Battery Huge Power
LED Video Light**



Features



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Easy to charge up the
battery pack
BATCELL26650x6



Built-in red color led
enhances focusing
performance

25000 LUMENS

Angle of light beam

160°

SPECIFICATIONS

Light source	: 35 x XML LED + 10 x XPE Red LED
Light output	: 2500 Lm (level I), 6250 Lm (level II) 12500 Lm (level III), 25000 Lm (level IV)
Light output (Red color mode)	: 1000 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL26650x6
Angle of light beam	: 160° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 4 hrs(level III) 8 hrs(level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 96 x L. 148.7mm
Weight in air	: 1547 g (including battery)
Buoyancy in seawater	: -569 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



35pcs XML LED to provide 25000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Protective case for VL25000PM. Sold separately

VL30000P


Li ion Rechargeable Battery
Ultra Power LED Video Light



Features



4 levels of brightness,
1 level of brightness of
Red color mode and
SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Easy to charge up the
battery pack
BATCELL15K



Built-in red color led
enhances focusing
performance

**The Most
Brightness**

**30000
LUMENS**

Angle of light beam

160°

SPECIFICATIONS

Light source	: 35 x XML LED + 10 x XPE Red LED
Light output	: 3000 Lm (level I), 7500 Lm (level II) 15000 Lm (level III), 30000 Lm (level IV)
Light output (Red color mode)	: 1000 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL15K
Angle of light beam	: 160° wide beam
Color temperature	: 6500K
Burn time	: 2.5 hrs (level IV), 5 hrs(level III) 10 hrs(level II) and 25 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 108 x L. 152.4mm
Weight in air	: 2300 g (including battery)
Buoyancy in seawater	: -940 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



35pcs XML LED to provide 30000 lumens



Comes with ball joint for easy system setup



Ergonomic aluminum handle comes in a package



Protective case for VL 30000P.
Sold separately

TL 18000P


Li ion Rechargeable Battery
Super Power LED Tech Light



Features



4 Levels of brightness
and SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



Easy to charge up the
battery pack
BATCELL15K

SPECIFICATIONS



Light source	: 14 x XML LED
Light output	: 1800 Lm (level I), 4500 Lm (level II) 9000 Lm (level III), 18000 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL15K
Angle of light beam	: 10° narrow beam
Color temperature	: 6500K
Burn time	: 3 hrs (level IV), 6 hrs(level III) 12 hrs(level II) and 30 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 124 x L. 174.5mm
Weight in air	: 2465 g (including battery)
Buoyancy in seawater	: -880 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



Ergonomic aluminum handle comes in a package



Protective case for TL 18000P.
Sold separately

TL 18000PC



Li ion Rechargeable Battery
Super Power LED Tech Light with
Battery Canister



Features



4 Levels of brightness
and SOS controlled by a
reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL15K Li ion
Rechargeable Battery



Ergonomic aluminum
handle comes in a
package

SPECIFICATIONS



Light source	: 14 x XML LED
Light output	: 1800 Lm (level I), 4500 Lm (level II) 9000 Lm (level III), 18000 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack BATCELL15K
Angle of light beam	: 10° narrow beam
Color temperature	: 6500K
Burn time	: 3 hrs (level IV), 6 hrs(level III) 12 hrs(level II) and 30 hrs (level I)
Maximum depth	: 100 m tested
Size (Light head)	: Dia. 124 x L. 105.2mm
Size (Canister)	: Dia. 104 x L. 142mm
Weight in air (Light head)	: 1432g
Weight in air (Canister)	: 1741g
Buoyancy in seawater : -460g (Light head)	
Buoyancy in seawater : -523g (Canister)	
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



Protective case for
TL 18000PC.
Sold separately



Easy to charge up
the canister

BLACK MOLLY II AL 1800XWP TRI COLOR



SPECIFICATIONS


Light source	: 4 x XML LED + 2 x XPE Red LED
Light output (Cool white mode)	: 450 Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Warm white mode)	: 450 Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Red color mode)	: 150 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 26650
Angle of light beam	: 120° wide beam
Color temperature	: 6500K cool white and 5500K warm white
Burn time	: 2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 38.8 x L. 127.5 mm
Weight in air	: 223 g (including battery)
Buoyancy in seawater	: -112 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Built-in red color led enhances focusing performance



3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Built in yellow color led enhances warmer color tone



BATCELL26650 Li ion Rechargeable Battery



Comes with ball joint for easy system setup

BLACK MOLLY III AL 2600XWP



SPECIFICATIONS

Light source	: 4 x XML LED + 2 x XPE Red LED
Light output	: 260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Red color mode)	: 150 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 26650
Angle of light beam	: 120° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 38.8 x L. 127.5 mm
Weight in air	: 223 g (including battery)
Buoyancy in seawater	: -112 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Built-in red color led enhances focusing performance



4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Removable yellow filter enhances warmer color tone




BATCELL26650 Li ion Rechargeable Battery



Comes with ball joint for easy system setup

GREEN SPOT LIGHT RED SPOT LIGHT

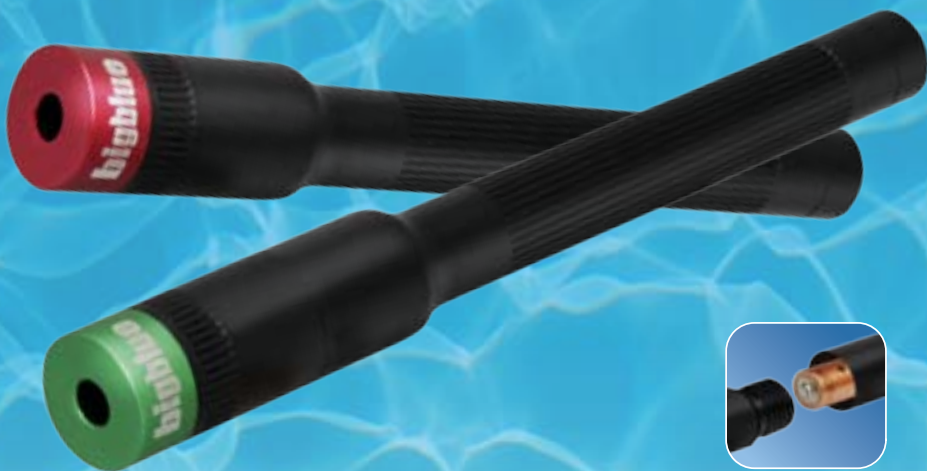

Operate with
2 x AAA batteries

SPECIFICATIONS

	Green Spot Light	Red Spot Light
Light source	: Green Laser	Red Laser
Light output	: Below 1 mW	Below 1 mW
Casing material	: Aluminum alloy. Anti-corrosive anodized	Aluminum alloy. Anti-corrosive anodized
Power source	: 2 x AAA alkaline or Ni-MH batteries	2 x AAA alkaline or Ni-MH batteries
Wavelength	: 520nm	650nm
Burn time	: Up to 24 hrs	Up to 24 hrs
Maximum depth	: 100 m tested	100 m tested
Size	: Dia. 19 x L. 168.6 mm	Dia. 19 x L. 154.1 mm
Weight in air	: 89 g (including batteries)	82 g (including batteries)
Buoyancy in seawater	: -54 g (including batteries)	-51 g (including batteries)
Switching system	: Twisting Bezel	Twisting Bezel
Front glass	: Tempered optical glass	Tempered optical glass
Lanyard	: Included	Included

AL 1100NP

**Li ion Rechargeable Battery Narrow Beam
LED Light**




SPECIFICATIONS

Light source	: XML LED
Light output	: 110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650
Angle of light beam	: 10° narrow beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 5 hrs(level III) 10 hrs(level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 35 x L. 145.1 mm
Weight in air	: 178 g (including battery)
Buoyancy in seawater	: -79 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



**BATCELL 18650 Li ion
Rechargeable Battery**



Our light can fit in
glove or pouch. Sold
separately.

AL 1100WP

Li ion Rechargeable Battery Wide Beam
LED Light




SPECIFICATIONS

Light source	: XML LED
Light output	: 110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650
Angle of light beam	: 85° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 38.8 x L. 134 mm
Weight in air	: 182 g (including battery)
Buoyancy in seawater	: -92 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Concave lens
Lanyard	: Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Comes with the clip for
easy system setup



Removable red and
yellow filters enhances
focusing performances
and warm color tone



Our light can fit in
glove or pouch. Sold
separately.

AL 1100XWP

Li ion Rechargeable Battery Extra Wide
Beam LED Light




SPECIFICATIONS

Light source	: XML LED
Light output	: 110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650
Angle of light beam	: 120° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 38.8 x L. 127.5 mm
Weight in air	: 170 g (including battery)
Buoyancy in seawater	: -85 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Comes with the clip for
easy system setup



Removable red and
yellow filters enhances
focusing performances
and warm color tone



Our light can fit in
glove or pouch. Sold
separately.

CF 1100P

**Li ion Rechargeable Battery Changeable
Focus LED Light**




SPECIFICATIONS

Light source	: XML LED
Light output	: 110 Lm (level I), 275 Lm (level II) 550 Lm (level III), 1100 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 18650
Angle of light beam	: 7° narrow beam to 37° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 39.5 x L. 172.1 mm
Weight in air	: 250 g (including battery)
Buoyancy in seawater	: -117 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included




4 Levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red color
/ Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery



Twist the front to
change the focus
(Turning force
increases with depth)

TL 3100P

Li ion Rechargeable Battery LED Tech Light




SPECIFICATIONS

Light source	: 3 x XML LED
Light output	: 310 Lm (level I), 775 Lm (level II) 1550 Lm (level III), 3100 Lm (level IV)
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 32650
Angle of light beam	: 10° narrow beam
Color temperature	: 6500K
Burn time	: 1.5 hrs (level IV), 3 hrs(level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 63x L. 135.6 mm
Weight in air	: 447 g (including battery)
Buoyancy in seawater	: -217 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



4 Levels of brightness and SOS controlled by a reliable push button design



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



BATCELL 32650 Li ion Rechargeable Battery



Ergonomic aluminum handle comes in a package



Sturdy Goodman Glove for handy Tech-diver operation



Goodman handle with connector. Sold separately

VTL 3100P

Li ion Rechargeable Battery LED Video / Tech Light



120°
Wide beam
10°
Narrow beam

SPECIFICATIONS

Light source	: 7 x XML LED + 2 x XPE Red LED
Light output (Flood beam mode)	: 310 Lm (level I), 775 Lm (level II) 1550 Lm (level III), 3100 Lm (level IV)
Light output (Spot beam mode)	: 1000 Lm
Light output (Red color mode)	: 100 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 32650
Angle of light beam	: 120° wide beam and 10° narrow beam
Color temperature	: 6500K
Burn time	: 1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 55.5 x L. 140.6 mm
Weight in air	: 432 g (including battery)
Buoyancy in seawater	: -205 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Sturdy glove for hands-free operation underwater




4 levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design




Built-in red color led enhances focusing performance



Removable yellow filter enhances warmer color tone



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color



Angle of light beam



BATCELL 32650 Li ion Rechargeable Battery



Comes with ball joint for easy system setup

VL 3500P

Li Ion Rechargeable Battery LED Video Light



Best
For Video

120°

Angle of light
beam

SPECIFICATIONS

Light source	: 6 x XML LED + 4 x XPE Red LED
Light output (Flood beam mode)	: 350Lm (level I), 875 Lm (level II) 1750 Lm (level III), 3500 Lm (level IV)
Light output (Red color mode)	: 200 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: Li ion Rechargeable battery pack 32650
Angle of light beam	: 120° wide beam
Color temperature	: 6500K
Burn time	: 1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 52.5 x L. 118.1 mm
Weight in air	: 343 g (including battery)
Buoyancy in seawater	: -169 g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass
Lanyard	: Included



Sturdy glove for
hands-free operation
underwater



4 levels of brightness
for Flood beam mode, 1
level of brightness of Red
color mode and SOS
controlled by a reliable
push button design




BATCELL 32650 Li ion
Rechargeable Battery



Built-in red color LED
enhances focusing
performance



Comes with ball joint
for easy system setup



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



Removable yellow filter
enhances warmer color
tone

EASY CLIP MULTI-COLOR LIGHT



SPECIFICATIONS

- Available eleven color output – Red, Green, Blue, Purple, Yellow, Flash red, Flash green, Flash blue, Flash purple, Flash yellow, automatically run all ten modes.
- 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

Easily clip the light on the
goggle, mask, belt and etc.

EASY CLIP LIGHT



SPECIFICATIONS

- Available three color output – Blue, Red, Green
- Up to 72 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater





LIGHT HEAD



VTL 5500PLH



TL 4500PLH



VTL 3100PLH



TL 3100PLH



AL 1100NPLH



AL 1100WPLH

Available Now!



Light heads can fit for VTL 5500P, TL 4500P, VL 7500P & VL 5800P Tri Color.

VL 7500PLH / VL 5800PLH TRI COLOR



Light heads can fit for VTL 3100P, TL 3100P & VL 3500P.

VL 3500PLH



Light heads can fit for AL 1100NP, AL 1100WP & AL 1100XWP.

AL 1100XWPLH

AL 450WM

450
lumens

Upgraded



3xAAA stand-alone
battery holder



AL 450WM LED with Glove



AL 450WM LED with Pouch



AL 450WM LED with
Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.108.8mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 152g (including batteries) weight in air
- -72g (including batteries) buoyancy in seawater

AL 450NM SPOTTER

450
lumens

Upgraded



3xAAA stand-alone
battery holder



AL 450NM LED with Glove



AL 450NM LED with Pouch



AL 450NM LED with Pouch
and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.42 x L.114.1mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 176g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater

AL 450MAFO

Upgraded

450
lumens



Automatic Flash Off
Function AFO interval :
1 sec. +/- 0.3 sec.

SPECIFICATIONS

- Automatic Flash Off function
- Angle of light beam: 55°
- AFO interval : 1 sec. +/- 0.3 sec.
- 450 Lumens Cree LED
- Size: Dia.48.4 x L119.9mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Up to 4hrs of burn time
- 100 meters tested
- Lanyard and Clip included
- 228g (including batteries) weight in air
- -99g (including batteries) buoyancy in seawater



3xAAA stand-alone
battery holder



Removable red filter
enhances focusing
performances

CF 450

450
lumens

5X
Focusable



Twist the front to change the focus
(Turning force increases with depth)



Magnetic Swivel Switch allows
for one hand operation



3xAAA stand-alone
battery holder



CF 450 LED with Glove



CF 450 LED with Pouch



CF 450 LED with Pouch and Glove

SPECIFICATIONS

- 450 Lumens Cree LED
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Up to 4hrs of burn time
- Lanyard included
- 100 meter tested
- 235g (including batteries) weight in air
- -113g (including batteries) buoyancy in seawater

AL 250

Multi-function Aluminum LED Light



Light is suitable for multi-function



Available in 5 colors

SPECIFICATIONS

Light source	: 1x XPG LED
Light output	: 250 Lm
Casing material	: Aluminum alloy. Anti-corrosive anodized
Power source	: 2xAA alkaline or Ni-MH batteries
Angle of light beam	: 8° narrow beam
Color temperature	: 6500K
Burn time	: Up to 2 hrs
Maximum depth	: 100 m tested
Size	: Dia. 28 x L. 147.8mm
Weight in air	: 135g (including batteries)
Buoyancy in seawater	: -85g (including batteries)
Front glass	: Tempered optical glass



Operate with 2xAA batteries



Our light can fit in glove or pouch. Sold separately.

HL 1000XW

Li ion Rechargeable Battery
Extra Wide Beam LED HEAD Light



SPECIFICATIONS

Light source	: 2x XML LED + 2 x XPE Red LED
Light output	: 100 Lm (level I), 250 Lm (level II) 500 Lm (level III) 1000 Lm (level IV)
Light output (Red color mode)	: 150 Lm
Casing material	: Aluminum alloy light head and Polycarbonate body
Power source	: Li ion Rechargeable battery pack 18650
Angle of light beam	: 120° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 36.8 x L. 84.4mm with light head dia. 38.8mm
Weight in air	: 207g (including battery)
Buoyancy in seawater	: -76g (including battery)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and SOS
controlled by a reliable
push button design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



BATCELL 18650 Li ion
Rechargeable Battery

HL 450XW

Extra Wide Beam LED HEAD Light



SPECIFICATIONS

Light source	: 2x XML LED + 2 x XPE Red LED
Light output	: 45 Lm (level I), 113 Lm (level II) 225 Lm (level III) 450 Lm (level IV)
Light output (Red color mode)	: 100 Lm
Casing material	: Aluminum alloy light head and Polycarbonate body
Power source	: 3 x AAA alkaline batteries
Angle of light beam	: 120° wide beam
Color temperature	: 6500K
Burn time	: 2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 36.8 x L. 84.4mm with light head dia. 38.8mm
Weight in air	: 189g (including batteries)
Buoyancy in seawater	: -58g (including batteries)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



Built-in red color led
enhances focusing
performance



4 levels of brightness,
1 level of brightness of
Red color mode and SOS
controlled by a reliable
push button design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color



3 x AAA alkaline
batteries

HL 450N

Narrow Beam LED HEAD Light




SPECIFICATIONS

Light source	: Cree LED
Light output	: 45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Casing material	: Aluminum alloy light head and Polycarbonate body
Power source	: 3 x AAA alkaline batteries
Angle of light beam	: 8° narrow beam
Color temperature	: 6500K
Burn time	: 2hrs (level IV), 4 hrs(level III) 8hrs(level II) and 20hrs (level I)
Maximum depth	: 100 m tested
Size	: Dia. 36.8 x L. 84.4mm with light head dia. 41mm
Weight in air	: 187g (including batteries)
Buoyancy in seawater	: -56g (including batteries)
Switching system	: Push button with battery indicator
Front glass	: Tempered optical glass



4 levels of brightness
and SOS controlled by
a reliable push button
design



Battery level indicator
built-in: Blue color /
Green color / Red
color / Flash Red color





3 x AAA alkaline
batteries

FLUORODIVE KIT SETS

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.

Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions. These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers.


Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!

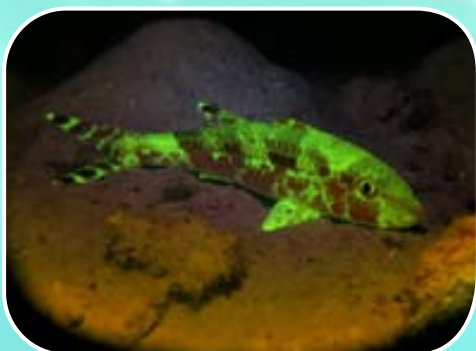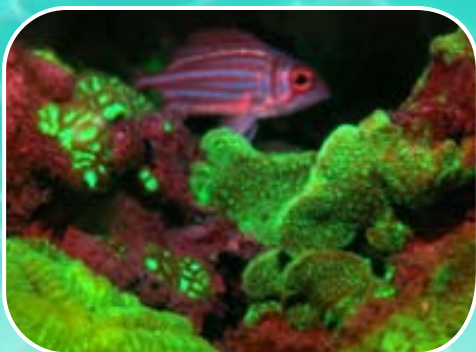

Photos of the fluorescence stimulated by the specific wavelength and captured through a barrier filter

Camera Filters

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.

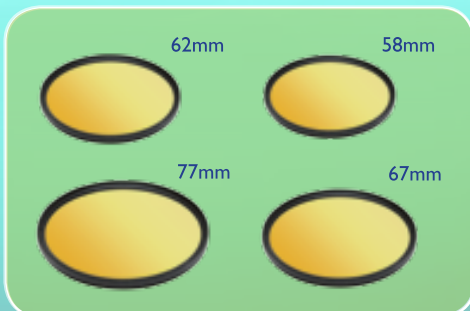

**CF 450 / CF 1100P / AL 1100WP / AL 1100XWP /
BLACK MOLLY II / BLACK MOLLY III / HL 450XW /
HL1000XW / Fluorodive Kit**



**VL 3500P / VTL 3100P / VTL 5500P /
VL 5800P Tri Color /
VL 7500P Fluorodive Kit**



COMBO PACK



AL 250

Multi-function Aluminum LED Light

AL 1100NP

Li ion Rechargeable battery
Narrow Beam LED Light



COMBO PACK



AL 250

Multi-function Aluminum LED Light

AL 1100WP

Li ion Rechargeable battery
Wide Beam LED Light



BBGPTRAY

GO Pro Tray



GO PRO KIT SETS

GP3500 Kit

- 1 pc. of Double Clip (CLP02)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP1100 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



Protective Case for Go Pro Tray Kit Set

- 1 pcs. of ALI100WP
- 1 pcs. of ALI100XWP
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable GO Pro Tray



SINGLEARMTRAY

Single Arm GO Pro Tray



PROTECTIVE CASE SERIES



SPECIFICATIONS

Model :	PC 101	PC 102	PC 103	PC 104	PC 105	PC 106
Outer dimension :	230 x 190 x 90 mm	280 x 246 x 106 mm	355 x 272 x 106 mm	355 x 272 x 166 mm	415 x 335 x 120 mm	415 x 335 x 180 mm
Inner dimension :	207 x 143 x 79 mm	260 x 220 x 93 mm	335 x 230 x 93 mm	335 x 230 x 153 mm	388 x 272 x 108 mm	388 x 272 x 168 mm
Case can fit for	AL 1100NP, AL 1100WP, AL 1000XWP, CF 1100P, Black Molly II, Black Molly III	VL 3500P, VTL 3100P, TL 3100P	VL 7500P, VL 5800P Tri Color, VTL 5500P, TL 4500P	VL 30000P, VL 25000PM, TL 18000P, VL 15000P Pro, VL 15000P Pro Tri Color	Go Pro Tray Kit Set	TL 18000PC, TL 4500PC, VL 15000PC Pro

ACCESSORIES



BATCELL18650

Battery for AL 1100NP /
AL 1100WP / AL 1100XWP /
CF 1100P / HL 1000XW



BATCELL26650

Battery for Black Molly II /
Black Molly III



BATCELL32650

Battery for VL 3500P / VTL 3100P /
TL 3100P



BATCELL18650x4

Battery for VL 7500P / VTL 5500P /
TL 4500P / VL 5800P Tri Color




BATCELL26650x4

Battery for VL 15000P Pro /
VL 15000P Pro Tri Color



BATCELL26650x6

Battery for VL25000PM



BATCELL15K

Battery for VL 30000P /
TL 18000P / TL 18000PC



BATCELL32650x4CANISTER

Battery for TL 4500PC / VL 15000PC Pro



BATCHR26650x4

Charger for VL 15000P Pro /
VL 15000P Pro Tri Color



BATCHR18650x4

Charger for VL 7500P / VTL 5500P /
TL 4500P / VL 5800P Tri Color



BATCHR15K/26650x6

Charger for VL 30000P /
TL 18000P / TL 18000PC /
VL 25000PM



BATCHR18650

Charger for AL 1100NP / AL 1100WP /
AL 1100XWP / CF 1100P / HL1000XW



BATCHR32650/26650

Charger for VL 3500P /
VTL 3100P / TL 3100P /
Black Molly II / Black Molly III



**BATCHR32650x4
CANISTER**

Battery for TL 4500PC /
VL 15000PC Pro /



VLGGLOVE

Reinforced goodman glove for VL 3500P /
VTL 3100P / TL 3100P / VL 7500P /
VTL 5500P / TL 4500P / VL 5800P Tri Color



NPGGLOVE

Neoprene glove for AL 1100NP /
AL 1100WP / AL 1100XWP



NPGGLOVEM

Neoprene glove for Mini Light



NPRPOUCH

Neoprene pouch with
retractor for AL 1100NP /
AL 1100WP /
AL 1100XWP



NPRPOUCHM

Neoprene pouch with
retractor for Mini Light



NPHOODMS

Neoprene hood for one
light holster



NPHOODMD

Neoprene hood for two
light holster



LNTHANDLE

Lantern style handle



GHA-01C

Goodman handle with connector for
TL 3100P / TL 4500P / TL 4500PC



CLIPMNTAL

Mounting clip for AL 1100WP /
AL 1100XWP / CF 1100P



CLIPMNTCF

Mounting clip for CF 450 /
AL 450WM / AL 450MAFO



FDMASKYL

Yellow filter for Fluorodiving



FILYELSM

Yellow filter for AL 1100WP /
AL 1100XWP / Black Molly III /
HL450XW / HL 1000XW



FILREDSM

Red filter for AL 1100WP /
AL 1100XWP



FILYELLG

Yellow filter for VL 3500P
/ VTL 3100P / VL 7500P /
VTL 5500P



FILREDMD

Red filter for
AL 450MAFO

EASY RELEASE MOUNT SERIES



Easy Release Glove



Easy Release Goodman Handle



Easy Release GoPro Mount Glove

PHOTO/VIDEO ARMS & ACCESSORIES

Clips

- Made of T6061 grade aluminum
- Available in 2 versions: double clip and a triple clip
- Ergonomic handle makes it easy to twist on and off

CLP 02 Double clip



CLP 03 Triple clip



Arms

- Full T6061 grade aluminum
- Triangular structural design makes it strong and lightweight
- Available in 4 lengths: 5", 8", 12", 16"



DA SERIES



DA001

Hot Shoe Adapter



DA002

Sea & Sea Adapter



DA003

Light & Motion Adapter



DA004

Standard Dovetail Plate



DA005

8mm Thread



DA006

Sea & Sea Light Adapter



DA007

Sea & Sea Hot Shoe Adapter



DA008

Sea & Sea Medium



DA009

Sea & Sea Standard



DA010

Base Plate Ball Mount



DA011

T-Groove Adapter



DA012

Universal Mount Base



DA013F

1/4" Thread Adapter



DA013M

1/4" Thread Adapter



DA014

Ikelite 200 Strobe Adapter



DA015

Single Ball Arm with Sea & Sea Adapter



DA016

UK Light Adapter



DA017

Standard Dovetail



DA018

Iron Z Series Strobe Adapter



DA022

Slot Stay



DA023

6mm Thread Adapter

Specifications subject to change without prior notice.



OUR DISTRIBUTORS & DEALERS

Australia Distributor : Adreno

Contact Person : Robbie Lewis
E-mail : robbie@adreno.com.au
Phone : 61-07-3391-2299
Mail : 54-58 Deshon Street, Woolloongabba,
Brisbane, QLD 4102, Australia

Asia Pacific Distributor : Zgear Enterprise

Contact Person : Michael Lim
E-mail : bblights@zgear.us
Phone : 65-63093054
Mobile: 65-92346561
Mail : 35 Tai Seng Street #01-01, Tata Communication
Exchange Bldg, Singapore 534103

Brazil Distributor : Seasub

Contact Person : Pablo Y. Varela
E-mail : pablo@seasub.com.br
Phone : 55-11-38328342
Mail : Rua Baumann, 1039/1051,
Cep 05318000,
Sao Paulo, Brazil

Europe Distributor : Dive Technics

Contact Person : Pierre Pauwels
Roman Pauwels
E-mail : pierre@divetechnics.be
roman@divetechnics.be
Phone : 32-0-347-504-21
Fax: 32-0-347-504-33
Mail : Pater Domstraat 45A, Broechem 2520, Belgium

Indonesia Distributor : Divesea Indonesia

Contact Person : Adi Siagian
E-mail : team@divesea.com.sg
Phone : 65-90618078
Mail : APL Tower, 16th Floor, T-1 Central Park,
Podomoro City J1. Let. Jend. S. Parman,
Kav 28, Jakarta Barat, 11470 Indonesia

Japan Distributor : Zero Co., Ltd.

Contact Person : Katsuhiko Saotome
E-mail : zero@zero-zero.co.jp
Phone : 81-3-5721-1906
Fax: 81-3-5721-1910
Mail : 1-11-5 Takaban, Meguro-Ku,
Tokyo, Japan

Korea Distributor : King Sports

Contact Person : Mr. Chang / Yun Hee Chang
E-mail : kingdive@kingsports.co.kr
Phone : 82-2-3628251
Mail : 35-4, 1GA, Manri-Dong, Chung-Gu,
Seoul, Korea

Kuwait Dealer : Hashim Alaqeel Establishment

Contact Person : Abdullah Al Aqeel
E-mail : abdul_72@yahoo.com
Phone : 96-566621121
Mail : Qebila Block: 8, Building : 38, 1st Floor ,Office 26
Kuwait City, State of Kuwait

Malaysia Distributor :

Rainbow Runner Sdn Bhd

Contact Person : Sim
E-mail : ops@rainbowrunner.net
Phone : 60-341-622837
Fax: 60-341-617837
Mail : 5, Ukay Boulevard, Jalan Lingkaran
Tengah 2,Hulu Kelang, 68000 Ampang,
Selangor, Malaysia

Maldives Dealer : Villa Shipping and Trading Company PVT Ltd.

Contact Person : Sendi
E-mail : sendi@diveoceanus.com
Phone : 90-7999341
Mail : Villa Building, Ibrahim Hassan Didi Magu,
P.O. Box 2073, Male 20187 Maldives

Philippines Distributor : Dive Supply Subic, INC.

Contact Person : Rowena Merto
E-mail : muriel@aquaventurewhitetip.com
Phone : 63-2-708-9996
Mail : Office 6&7 EMS Building, 14th Street
Subic Gate Perimeter Road, Subic Bay
Freeport Zone, Olongapo City,
2222 ,Philippines

Poland Distributor : Waterfall

Contact Person : Darek
E-mail : darek@waterfall.pl
Phone : 48-600-340-002
Mail : UL. Klimczaka 22D/3, 02-797 Warszawa
Poland PL 7621470585

Scandinavian Distributor : AquaFun AB

Contact Person : Sales Office
E-mail : info@aquafun.se
Phone : 46-0-40-295-300
Mail : Sangleksgatan 4E, 215 79, Malmö,
Sweden

**Singapore Distributor :
Divesea (Camsquare) Pte Ltd**

Contact Person : Peter Soh
E-mail : petesoh@gmail.com
Phone : 65-90618078
Mail : IJ Pine Grove #06-37, Ulu Pandan Road,
Singapore 598001

**South Africa Distributor:
Manex & Power Marine**

Contact Person : Gavin Jones
E-mail : gavin.jones@manex.co.za
Phone : 27-021-511-7292
Mail : 9 Paarden Eiland Road, Paarden Eiland,
South Africa

**Switzerland Distributor :
Tiefenstein AG, Unterwasserwelten**

Contact Person : Garry Stuber & Erwin Rudolf
E-mail : bigblue@tiefenstein.ch
garrystuber@tiefenstein.ch
Phone : 41-0-715350973
Mail : Seestrasse 19, CH-9326, Horn, Switzerland

**Spain Dealer :
Girona Dive & Underwater Image, SCP**

Contact Person : Toni Ferrer
E-mail : info@gidivestore.com
Phone : 34-619-735-461
Mail : Carretera De Samalus , 41
08530 La Garriga, Barcellona Spain

Spain Dealer : Kanau
Contact Person : Alfonso Adeva
E-mail : alfonso@kanau.com
Phone : 34-91-611-11-10
Mail : C/Betanzos, 3
28925 Alcorcon, Madrid Spain

Spain Dealer : Vellmari Dive Center Pitiusub SL

Contact Person : Manu San Felix
E-mail : manu@vellmari.com
Phone : 34-619-735-461
Mail : Marina De Formentera 14,
07870 Formentera, Spain

**Turkey Distributor : K Pro Doga Sporlari
Malzemeleri Tic. Ltd. STI**

Contact Person : Akin Kaftanoglu
E-mail : akinkaftanoglu@yahoo.com
Phone : 90-3124334479
Mail : Bulbulderesi Cad. No.: 23/A, Seyranbaglari,
Ankara, Turkey

U.A.E. Distributor : Senyar Marine Equipment

Contact Person : Abdulla Ai Kindi
E-mail : senyar7@gmail.com
Phone : 971-2-666-9999
Fax: 971-2-643-9960
Mail : P.O. Box 112790, Abu Dhabi, U.A.E.

**United Kingdom / Ireland Distributor :
Liquid Sports Ltd.**

Contact Person : Alastair Ansell
E-mail : alastair@liquidsports.co.uk
Phone : 44-0-7585-935522
Mail : 11 Stag Lane, Berkhamsted,
Hertfordshire, HP4 1FJ, UK



Headquarters :

Bossk International Company Limited

Contact Person : Oscar Tong

E-mail : oscar@bigblue.com.hk

Phone : 852-3568-0773

Fax: 852-3998-3127

Mail : Room 818,8/F, Po Yip Building, 23. Hing Yip

Street, Kwun Tong, Hong Kong

Website : www.bigblue.com.hk

www.bigbluedivelights.com

US Sales Office : BosskUSA / Bigblue Dive Lights

Contact Person : Tim Ratcliffe

E-mail : sales@bigbluedivelights.com

Phone : 727-442-2300

Fax: 727-499-7117

Mail : 1710N Hercules Ave, Suite 103, Clearwater,

FL 33765 USA